



BRICKELL CITY CENTRE


Bulletin 28

Chilled Water Tie-In Procedures

1. All piping material shall match the existing Brickell City Centre chilled-water system with dielectric unions at dissimilar materials.
2. Tenant chilled-water piping must be cleaned and flushed prior to final connection to BCC base building piping.
3. Air bleeders must be installed at each tenant space to bleed as much air out of remote piping as possible.
4. Leak testing must be performed prior to contractor insulating chilled-water piping. Contractor must notify mall Operations to verify there are no leaks.
5. Contacts:

- Scott Harper/Chief Engineer (786) 509-1142
sharper@swireprops.com

6. All chilled-water piping must have the following:

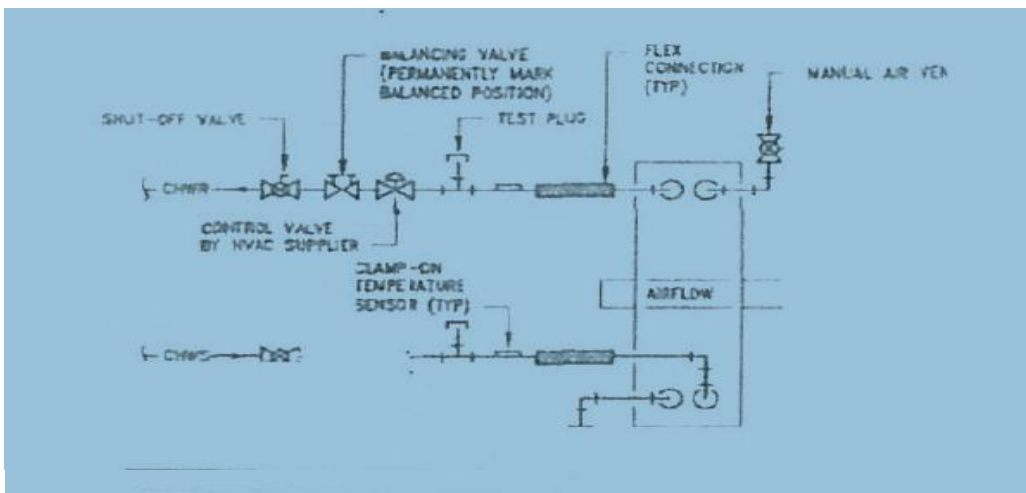

FOR MULTIPLE COILS PROVIDE 50
ON SUPPLY AND RETURN LINES

IF SYSTEM PRESSURE EXCEEDS 1
HVAC SUPPLIER TO VERIFY THAT
PIPING ACCESSORIES ARE PROVIDE
SPECIFIC PRESSURE REQUIREMEN

7. See Bulletin 25 for specified BTU meter.